



#### **TECHNOLOGY**

- System capacity for refrigerated reagents up to 30 positions with independent power supply
- Automatic and configurable management of the fluidic system, equipped with anti-bubble technology, to ensure optimal performance
- Last-generation optical systems with hard-coated filters, to provide maximum stability and durability in any environment
- Rotors made of UV-VIS optical quality methacrylate, with automatic status checking
- New design of racks to improve sample detection

### **ECONOMY**


- New software to allow reduction of reagent dead volumes
- Reduced water consumption, with automated sensors to alert in case of insufficient volume to work
- High accuracy dispensing systems: CV lower than 2% for 3 μL of sample.
- Minimum volume in cuvette of 200 μL
- New hardware components with higher durability
- Better efficiency with extrapolation of the calibration curve for samples with high results

### **ERGONOMY**

- Real time monitoring of worklist
- Automatic assignment of reagent to racks, or use pre-programmed racks
- Preserving racks configuration in each worklist
- Intuitive and easy to follow software, including LIMS integration, STAT and Internal Quality Control Management
- Automated self-check and end-of-day when switching on and switching off
- Automatic and configurable management of reagent interference
- New more friendly organization of help archives
- Conditioning components always installed in the system (Washing Solution and System Liquid)



 Long term use without maintenance of ceramic piston



Improved optic system



- · User friendly graphic interface
- Automatic Tasks through "Auto" buttons

# DEDICATED REAGENTS



Biosystems has developed a wide range of reagents intensively evaluated in different workload conditions and validated according to the European IVD Directive CE to achieve the highest performance in A25 and A15 systems. Biosystems recommends their use according to the instructions and applications validated by Biosystems.

### Biochemistry


Adenosine Deaminase (ADA)	4 x 10 mL
α-Amylase Direct	5 x 20 mL
α-Amylase Pancreatic	1 x 50 mL
Alanine Aminotransferase (ALT/GPT)	5 x 20 mL
Albumin	5 x 50 mL
Alkaline Phosphatase (ALP)-AMP	5 x 50 mL
Alkaline Phosphatase (ALP)-DEA	5 x 50 mL
Aspartate Aminotransferase (AST/GOT)	5 x 20 mL
Bilirubin Direct	5 x 50 mL
Bilirubin Total	5 x 50 mL
Calcium Arsenazo	2 x 50 mL
Cholesterol	10 x 50 mL
Cholesterol HDL Direct	4 x 20 mL
Cholesterol LDL Direct	4 x 20 mL
Creatin Kinase (CK)	5 x 50 mL
Creatin Kinase MB (CK-MB)	5 x 50 mL
Creatinine	10 x 50 mL
γ-Glutamyltransferase (γGT)	5 x 50 mL
Glucose	10 x 50 mL
Iron Ferrozine	5 x 50 mL
Lactate Dehydrogenase (LDH)	5 x 50 mL
Lipase	2 x 24 mL
Magnesium	5 x 20 mL
Phosphorus	5 x 50 mL
Protein (Total)	5 x 50 mL
Protein (Urine)	10 x 50 mL
Triglycerides	5 x 50 mL
Urea-BUN UV	10 x 50 mL
Uric Acid	10 x 50 mL

### Turbidimetry

	GOVERNS TO I
Albumin (Microalbuminuria)	1 x 20 mL
Anti-Streptolysin O (ASO)	2 x 20 mL
Antithrombin III	1 x 50 mL
CReactive Protein (CRP)	2 x 20 mL
CReactive Protein-High Sensitivity	1 x 20 mL
Complement Component C3	1 x 20 mL
Complement Component C4	1 x 20 mL
Ferritin	1 x 45 mL
Hemoglobin A1c	1 x 50 mL
Immunoglobulin A	1 x 20 mL
Immunoglobulin G	1 x 20 mL
Immunoglobulin M	1 x 20 mL
Rheumatoid Factors (RF)	1 x 50 mL
Transferrin	1 x 20 mL

Biosystems has achieved the best possible degree of adaptation between reagents and analyzers. Dedicated reagents presentations are designed to optimize the performance of our systems. As result, dedicated reagents can be installed directly in our analyzers providing us with great user facilities.

## THE PERFECT SYSTEM

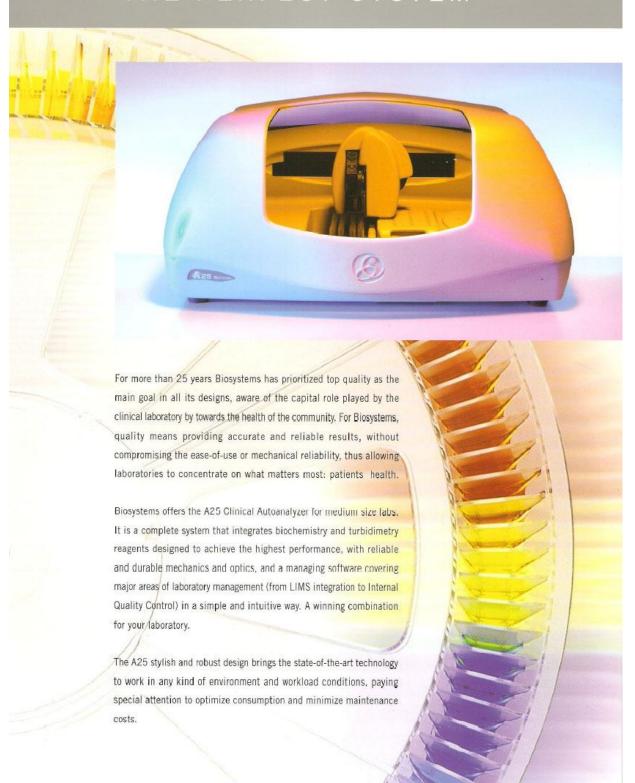

## TECHNICAL FEATURES

Random access automatic analyzer aimed at giving results per patient. Photometric reading directly in the reaction rotor.

Throughput	240 test/hour
Positions refrigerated reagents	30
Positions for Racks not refrigerated	3. Rack multipurpouse
Samples per Rack	24
Max. Number of Samples	72
Sample Tubes	ø13 mm, ø15 mm (max. height 100 mm)
	Cups ø13 mm
Reagents per Rack	10
Max. Number of Reagents not refrigerated	20
Reagent Bottles	20 mL and 50 mL
Dispensing Tip	Stainless Steel
Level Detection	Capacitive
Dosing Pump	Ceramic Piston
Reagent Volume (Program)	10 μL – 440 μL
Sample Volume (Program)	3 μL – 40 μL
System Liquid Bottle Volume	2700 mL
Waste Bottle Volume	2700 mL
Washing Solution Bottle Volume	2700 mL
Reusable Methacrylate Rotor	
Number of Wells	120
Reaction Volume range	200 μL - <b>800</b> μL
Lightpath	6 mm
Light Source	Halogen lamp 12 V, 20 W
Photometric Detection System	Silicon photodiode
Measurement Range	From -0.05 A to 2.5 A
Spectral Range	340 nm - 900 nm
Filter Configuration	340, 405, 505, 535, 560, 600, 635, 670
Physical Dimensions	1080 x 695 x 510 mm (deph x wide x height)
Weight	73 kg (162 lb)





BioSystems, S.A reserves the right to change specifications of the instrument at any time 636 to technical improvements.







 Cortified Management System
EN ISO 9901
FIN ISO 13485